



CABINET FILTER FANS

Pfannenbergl

4th Generation Filter Fans

Common Specifications:

Intake air-delivery flow
(extract delivery on request)

Tool-less "Click and fit" installation

Operating temperature -15/+55°C

IP54 rated


Continuous duty cycle

Replaceable filter mats

Filtered grilles for exhaust available

230VAC (other voltages on request)


Full range of accessories available
(thermostats, heaters, filtered grilles)

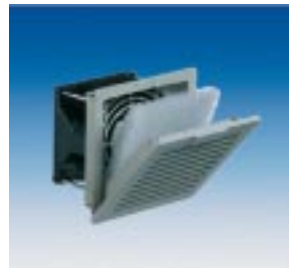

PF11.000
92mm² cutout
109mm² body
25 m³/h delivery



PF22.000
125mm² cutout
145mm² body
61 m³/h delivery

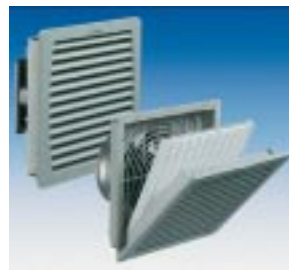

PF43.000
223mm² cutout
252mm² body
256 m³/h delivery



PF66.000
291mm² cutout
320mm² body
640 m³/h delivery



ELECTRADE NEW ZEALAND LIMITED

Auckland Tel: 09-525 1753
Fax: 09-525 1756

Christchurch Tel: 03-366 1242
Fax: 03-379 1991

Email: sales@electrade.co.nz
www.electrade.co.nz

CABINET THERMOSTATS & HEATERS

For use with Pfannenberg switchboard fans and heaters



FLZ DIN-Rail Mounted Cabinet Thermostats

Simple switching unit for fan/heater control
No power supply required
3 models:




FLZ 520 - 10A N/C contact (heating)

FLZ 530 - 10A N/O contact (cooling)

FLZ 510 1K - 10A C/O contact

Temperature range 0-60°C (other ranges on request)

NOTE: Capillary sensor version also available.

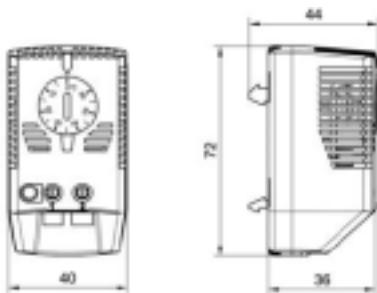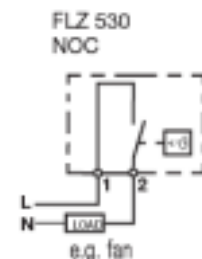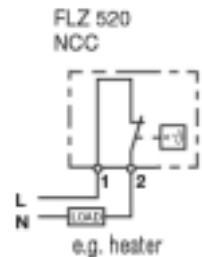

FLH DIN-Rail Mounted Cabinet Heaters

FLH045 stocked model
45W / 1.8A
110-250VAC supply
Max surface temp 105°C
100% duty cycle



* Range available from 10 to 400W - fan assisted heaters also available

